


# NOTES

- 1) RADIO EQUIPMENT ROOM: PROVIDE 4" FLAT BLACK VINYL COVE BASE CLUED TO WALLS ALL AROUND. PATCH AND REPAIR EXISTING EPOXY PAINT ON FLOOR AS NECESSARY. BATTERY ROOM AND UPS AREA: PATCH AND REPAIR EXISTING EPOXY PAINT ON FLOOR AS NECESSARY.
- 2) PROVIDE A MIN. OF (2) FINISH COATS SEMI-GLOSS ENAMEL FOR THE ENTIRE ROOM WALLS OF RADIO EQUIPMENT, BATTERY ROOM, CEILING OF BATTERY ROOM AND UPS AREA. ALL NEW WALLS AND CEILING SHALL ALSO HAVE A LATEX PRIMER COAT.
- 3) RADIO EQUIPMENT ROOM WALL SHALL BE TWO 5/8" TYPE X GYPSUM WALLBOARD ON BOTH SIDES OF 3 5/8" C" STUDS 25 GAGE AT 16" ON CENTER WITH 3 1/2" THICK R-11 FIBERGLASS INSULATION CONSTRUCTED FROM FLOOR TO SLAB.
- 4) BATTERY ROOM WALLS SHALL BE TWO 5/8" TYPE X GYPSUM WALLBOARD ON BOTH SIDES OF 3 5/8" C" STUDS UNPUNCHED 18 GAGE AT 16" ON CENTER WITH 3 1/2" R-11 FIBERGLASS INSULATION. BATTERY ROOM CEILING TO BE CONSTRUCTED OF 6" X 2" JOST, 18 GAGE CEILING JOISTS AT 16" O.C. WITH 3/4" FIRE-RETARDANT PLYWOOD WITH (2) LAYERS 5/8" TYPE X GYPSUM BOARD ON BOTH SIDES OF JOISTS AND 6 1/4" R-19 FIBERGLASS INSULATION.
- 5) PROVIDE METAL FRAME FOR DOUBLE DOORS, 1 1/2 HOUR UL RATED, MINIMUM 16 GAGE STEEL FRAME AND DOOR MINIMUM 16 GAGE, 1 3/4" HOLLOW METAL DOORS, 1 1/2 HOUR UL RATED IN LOCATIONS SHOWN ON PLAN. DOOR LOCKSET TO BE CORBIN-RUSSELL # M2257UM4826 LOCK WITHOUT CYLINDER. CYLINDERS PROVIDED AND INSTALLED BY OTHERS. BUTTS: STANLEY WORKS FB8179.
- 6) PROVIDE 7" HIGH WIRE PARTITIONS AND 3" WIDE DOOR WITH TWO PADLOCK "STAPLES" AT 21" AND 63" AFF. PADLOCKS BY OTHERS. "HORN" WIRE AND IRON WORKS TYPE NO. 130A OR APPROVED EQUAL. LOCK TO BE KEYS SAME AS DOORS (NOTE 5 ABOVE).
- 7) IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS HE IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER AN ITEM ON THIS DOCUMENT IN ANY WAY. IF AN ITEM BEARING THE SEAL OF AN ENGINEER IS ALTERED, THE ALTERING ENGINEER SHALL AFFIX HIS SEAL AND THE NOTATION "ALTERED BY" FOLLOWED BY HIS SIGNATURE AND THE DATE OF SUCH ALTERATION, AND A SPECIFIC DESCRIPTION OF THE ALTERATION.


## DOOR SCHEDULE

DOOR NO.	DOOR			FRAME					REMARKS
	OPENING SIZE	MAT'L	LVR/ U.C.	MAT'L	HEAD	SADDLE	UL LABEL	HOWR SET	
801	2(3'-0" x 7'-0")	H.M.		H.M.			C	NOTE 5	SEE NOTE 5 AND DOOR DETAIL ON THIS DRAWING
802	2(2'-8" x 7'-0")	H.M.		H.M.			C	NOTE 5	SEE NOTE 5 AND DOOR DETAIL ON THIS DRAWING
803	3'-0" x 7'-0"	H.M.		STL				NOTE 6	SEE NOTE 6




TYPICAL RADIO EQUIPMENT ROOM WALL TYPICAL BATTERY ROOM WALL

## TYPICAL 2-HOUR FIRE RATED WALLS


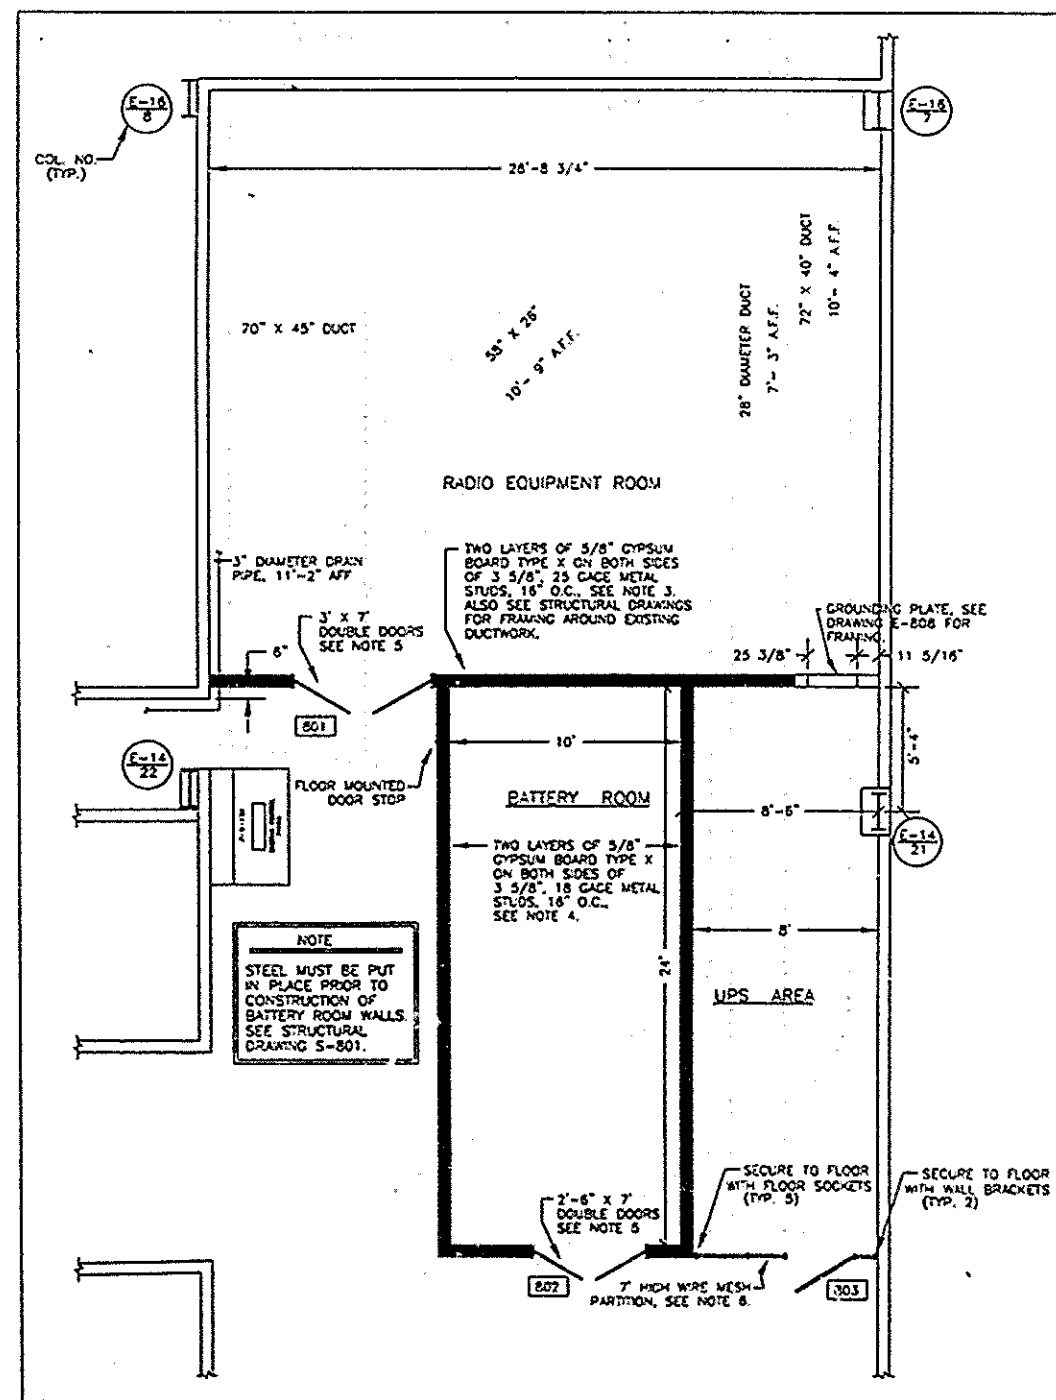


PARTIAL FLOOR PLAN

SCALE IN FEET



DOOR DETAIL



BATTERY ROOM CEILING JOIST LAYOUT

SCALE IN FEET

Sheet 91 of 112

THE PORT AUTHORITY  
OF NY & NJ



DESIGNED & SEALED BY  
N.Y. P.E. (OR R.A.)

Ram Communications  
Consultants, Inc.  
10 Woodbridge Center Drive  
Woodbridge, NJ 07095  
(908) 656-6870 fax (908) 656-7263

CONFORMED  
2/3/98

No.	Date	Revision	Approved

The  
World  
Trade  
Center

STANDBY POWER  
5 WORLD TRADE CENTER  
COMMUNICATIONS

CONSTRUCTION PLAN,  
WALL SECTIONS,  
DOOR DETAILS AND NOTES

The drawing subject to conditions in contract.  
All dimensions, ideas, designs and methods  
herein are reserved to Port Authority and  
may not be used without its written consent.

Designed by: R.M. Drawn by: S.C. Checked by: S.C.  
Date: \_\_\_\_\_ Scale AS NOTED  
Contract Number: WTC-945.071 Drawing Number: A-801